



We put space to work.

Item # _____

Job _____

Metro® Stem Casters - MetroMax®


Metro Stem-Type Casters are designed to fit MetroMax posts to form shelf carts and other mobile units. Bumpers are included.

Plated Casters with High Modulus treads

- Non marking high modulus donut tread and polyolefin hub. Plated horns, stems, axles, and brakes (optional) are appropriate for dry environments and for medium duty applications. Ball bearing swivel and axle. NSF listed. Bumpers included. Brake style: pedal brake.
- TPR tread (70 shore): Quieter than polyurethane and resilient rubber caster options.

Wheel Diameter (in.) (mm)	Face (in.) (mm)	Load Rating (lbs.) (kg.)	Type	Wheel Tread	Temperature range (Continuous usage)		Apprx. Pkd. Wt.		MetroMax Cat. No.
					(Fahrenheit)	(Celsius)	(lbs.)	(kg.)	
5 127	1.25 32	250 113	Stem/Swivel	High Modulus Donut	-20° - 180°	-29° - 82°	2.2	1.0	5MDXA
5 127	1.25 32	250 113	Stem/Brake	High Modulus Donut	-20° - 180°	-29° - 82°	2.4	1.1	5MDBXA
5 127	1.25 32	250 113	Stem/Rigid	High Modulus Donut	-20° - 180°	-29° - 82°	2.2	1.0	5MDXRA

Note: Rigid connecting channel (stainless steel): Cat. No. 14RS, 18RS, 21RS, 24RS.

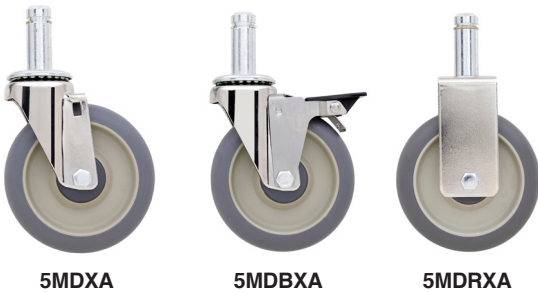

For all rigid casters.

Rigid stem casters improve tracking and handling of mobile units over long distances. Rigid caster channels are selected at the time of order.

How to Order:

Order (2) Rigid Casters
Select Rigid Channel based on the depth of the shelving. (Provided at no charge)

Bumpers are included with each caster.



Plated Casters with Polyurethane Tread

- Chrome plated horns, stems, axles, and brakes (optional) are appropriate for dry environments and for medium duty applications. Non marking polyurethane flat tread and polyethylene hub. Ball bearing swivel and axle. NSF listed. Bumpers included. Brake style: side brake.

Wheel Diameter (in.) (mm)	Face (in.) (mm)	Load Rating (lbs.) (kg.)	Type	Wheel Tread	Temperature range (Continuous usage)		Apprx. Pkd. Wt.		Cat. No.
					(Fahrenheit)	(Celsius)	(lbs.)	(kg.)	
5 127	1.25 32	300 135	Stem/Swivel	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.5	1.1	5MPX
5 127	1.25 32	300 135	Stem/Brake	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.7	1.2	5MPBX
5 127	1.25 32	300 135	Stem/Rigid	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.4	1.1	5MPRX

Note: Rigid connecting channel (stainless steel): Cat. No. 14RS, 18RS, 21RS, 24RS.



All Metro Catalog Sheets are available on our website: www.metro.com



InterMetro Industries Corporation
 North Washington Street, Wilkes-Barre, PA 18705
 Product Information. U.S. and Canada: 1.800.992.1776
 Outside U.S. and Canada: www.metro.com/contactus

LO2-263
Printed in U.S.A. 5/23

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2023 InterMetro Industries Corp.

METRO
Stem Casters — MetroMax®

9.28

Stem Casters - MetroMax

Plated Casters with resilient rubber treads

- Solid resilient rubber material. Plated horns, stems, axles, and brakes (optional) are appropriate for dry environments and for medium duty applications. Ball bearing swivel. NSF listed. Bumpers included. Brake style: side brake.

Wheel Diameter		Face		Load Rating		Type	Wheel Tread	Temperature range (Continuous usage)		Apprx. Pkd. Wt.		Cat. No.
(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg.)			(Fahrenheit)	(Celsius)	(lbs.)	(kg.)	
5	127	1-1/4	32	200	90	Stem/Swivel	Resilient, Flat	-20° - 160°	-29° - 71°	2.9	1.3	5MX
5	127	1-1/4	32	200	90	Stem/Brake	Resilient, Flat	-20° - 160°	-29° - 71°	3.1	1.4	5MBX
5	127	1-1/4	32	200	90	Stem/Rigid	Resilient, Flat	-20° - 160°	-29° - 71°	2.9	1.3	5MRX

Note: Rigid connecting channel (stainless steel): Cat. No. 14RS, 18RS, 21RS, 24RS.



5MX



5MBX



5MRX


**Bumpers are included
with each caster.**



Stem Casters - MetroMax

Polymer & Stainless Total-Guard Caster

- High rust protection: Reinforced nylon rig with Stainless Steel stem and hardware.
- Maintenance Free: Sealed swivel SS ball bearings and Delrin axle bearings.
- Swivel and Total Lock Brake options.
- Pedal brake locks the wheel and the swivel motion. More control than conventional stem casters with wheel brakes only.
- Non-marking Thermoplastic Elastomer [TPE] tread (70 shore) is quieter and more shock absorbent than a TPU tread.

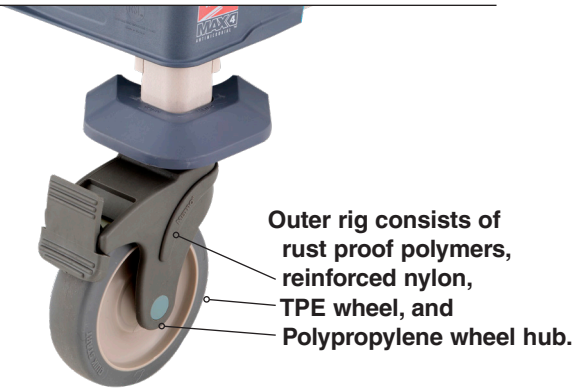

Wheel Diameter		Face		Load Rating		Type	Wheel Tread	Temperature range (continuous)		Apprx. Pkd. Wt.		Model No.
(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)			(Fahrenheit)	(Celsius)	(lbs.)	(kg)	
5	127	1.25	32	250	113	Stem/Swivel	TPE, Flat	-20° - 120°	-29° - 49°	1.8	0.8	5PSTEX
5	127	1.25	32	250	113	Stem/Brake	TPE, Flat	-20° - 120°	-29° - 49°	2.0	0.9	5PSTEBX

Best uses...

- Best suited for use with MetroMax and Metroseal shelving
- Best tread for high humidity controlled environments
- Excellent Corrosion Resistance
- Excellent Chemical Resistance
- Best option for aquatic facilities (environments with high salt exposure)
- Low magnetism: Best option for MRI and RFID applications
- A good option for cart wash chamber cleaning processes.

Where not to use...

- Tread not suited for exposure to acids or petroleum based chemicals.



5PSTEX
Swivel



5PSTEBX
Total Lock

Standard Polymer Casters

- Basic corrosion protection: Reinforced nylon rig with chromate plated stem and swivel raceway
- Maintenance Free: Sealed swivel ball bearings and Delrin axle bearings
- Swivel, Total-Lock Brake, and Rigid options
- Pedal brake locks the wheel AND swivel motion
- Non-marking polyurethane (TPU) tread
- Optional Models with built-in antimicrobial TPU tread

Bumpers are included with each caster.



Wheel Diameter		Face		Load Rating		Type	Wheel Tread	Temperature range (continuous)		Apprx. Pkd. Wt.		MetroMax Model No.
(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)			(Fahrenheit)	(Celsius)	(lbs.)	(kg)	
5	127	1.25	32	300	135	Stem/Swivel	Polyurethane, Flat	-20° - 120°	-49° - 49°	2.1	1.0	5PCX
5	127	1.25	32	300	135	Stem/Brake	Polyurethane, Flat	-20° - 120°	-49° - 49°	2.3	1.0	5PCBX
5	127	1.25	32	300	135	Stem/Rigid	Polyurethane, Flat	-20° - 120°	-49° - 49°	2.1	1.0	5PCRX
5	127	1.25	32	300	135	Stem/Swivel	Polyurethane, Flat	-20° - 120°	-49° - 49°	2.0	0.9	5PCXM
5	127	1.25	32	300	135	Stem/Brake	Polyurethane, Flat	-20° - 120°	-49° - 49°	2.2	1.0	5PCBXM

Tread with built-in antimicrobial.

Note: Rigid connecting channel (aluminum): Cat. No. P14RC, P18RC, P21RC, P24RC.

Best uses...

- Basic Corrosion Protection versus common industrial casters
- Good Chemical Resistance

Where not to use...

- Not suited for areas with spray sterilization processes on regular basis
- Not suited for high humidity controlled environments
- Not suited for high temperature cart wash chambers



5PCX
Swivel



5PCBX
Swivel & Brake



5PCXM
Antimicrobial
Tread Swivel



5PCBXM
Antimicrobial
Tread Swivel
Brake



Stem Casters - MetroMax

We put space to work.

Premium Type 304 Stainless Steel Casters

- Type 304 Stainless Steel Rig, Hardware and SS bearings.
- Non-marking Treads
- Swivel, Brake, and Rigid Options
- Pedal brake locks the wheel

Bumpers are included with each caster.



Polyurethane (TPU) Tread Models

Wheel Diameter (in.) (mm)	Face (in.) (mm)	Load Rating (lbs.) (kg)		Type	Wheel Tread	Temperature range (continuous) (Fahrenheit) (Celsius)		Apprx. Pkd. Wt. (lbs.) (kg)		MetroMax Model No.		
5	127	1.25	32	300	135	Stem/Swivel	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.3	1.0	5MPXGSA
5	127	1.25	32	300	135	Stem/Brake	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.5	1.1	5MPBXGSA
5	127	1.25	32	300	135	Stem/Rigid	Polyurethane, Flat	-20° - 180°	-29° - 82°	2.3	1.0	5MPRXGSA

Note: Rigid connecting channel (stainless steel): Cat. No. 14RS, 18RS, 21RS, 24RS.



5MPXGSA



5MPBXGSA



5MPRXGSA

Best uses...

- Best suited for high temperature cart wash chambers up to 180F (82C) when paired with Stainless Steel Shelving.
- Moving heavy loads regularly (90 shore TPU tread)
- High impact mobile uses (elevators, thresholds, ramps)
- Excellent Corrosion Resistance
- Excellent Chemical Resistance

Thermoplastic Rubber (TPR) Tread Models

Wheel Diameter (in.) (mm)	Face (in.) (mm)	Load Rating (lbs.) (kg)		Type	Wheel Tread	Temperature range (continuous) (Fahrenheit) (Celsius)		Apprx. Pkd. Wt. (lbs.) (kg)		MetroMax Model No.		
5	127	1.25	32	250	113	Stem/Swivel	TPR donut	-20° - 180°	-29° - 82°	2.4	1.1	5MDGSXA
5	127	1.25	32	250	113	Stem/Brake	TPR donut	-20° - 180°	-29° - 82°	2.6	1.2	5MDBGSXA
5	127	1.25	32	250	113	Stem/Rigid	TPR donut	-20° - 180°	-29° - 82°	2.4	1.1	5MDRGSXA

Note: Rigid connecting channel (stainless steel): Cat. No. 14RS, 18RS, 21RS, 24RS.



5MDGSXA



5MDBGSXA



5MDRGSXA

Best uses...

- Best tread for high humidity controlled environments
- Excellent Corrosion Resistance
- Excellent Chemical Resistance
- Softer TPR donut tread (70 shore) is more shock absorbent than TPU

Where not to use...

- Tread not suited for exposure to acids or petroleum based chemicals.

Maintenance - Stainless Casters

- TPU tread swivel and swivel/brake models: Swivel raceway has a grease fitting. The axle has sealed bearings that do not require additional lubrication.
- TPR tread swivel and swivel/brake models: swivel raceway and axles have grease fittings. Rigid caster model has an axle with a grease fitting.
- User should determine the frequency of maintenance based on their usage conditions.



We put space to work.

Stem Casters - MetroMax

- **Swivel and Swivel/Brake casters** rotate a full 360 degrees for easy maneuvering.
- **Brakes:** Wheel brakes are foot operated.
- **Bumpers:** Non Phthalate vinyl material is strong yet flexible to protect walls from damage. Each caster, except where noted, includes a 3-1/2" (89mm) diameter bumper. Optional 5" (127mm) diameter bumpers are available.
- **Weight Load Capacity** of a cart (evenly distributed): Caster Load Rating x 3.

Caster Wheel Material Guide

Caster Tread	Grease/Oil Resistance	Floor Protection	Load Rating	Key Advantage
Resilient Rubber	Low	High	200 lbs. (90kg)	Basic mobility.
High Modulus Rubber	High	High	250 lbs. (113kg)	Quieter than resilient rubber and polyurethane. Well suited for environments with constant exposure to moisture and/or high humidity.
Polyurethane	High	High	300 lbs. (135kg)	Easiest to move heavy loads.

Replacement Bumpers

Non Phthalate Vinyl

Height (in.)	Height (mm)	MetroMax Cat. No.
.84	22	M9992DBX



Rigid Caster Channels

- Typically used opposite two swivel style casters to create carts that are easy to steer over long distances.
- Note: A type 304 stainless rigid caster channel is included at no charge with each two rigid plated or SS casters. An aluminum rigid channel is included with each two polymer horn rigid casters (model 5PCR).



Rigid Caster Channel

Swivel Casters

For shelf depth		Cat. No.	(For use with 5PCR)	
(in.)	(mm)		Cat. No.	Cat. No.
14"	355	14RS	P14RC	
18"	457	18RS	P18RC	
21"	530	21RS	P21RC	
24"	610	24RS	P24RC	



24RS



P24RC

All Metro Catalog Sheets are available on our website www.metro.com.

an Ali Group Company



The Spirit of Excellence

